


ตู้คอนซูมเมอร์ยูนิต
"UTIC" CONSUMER UNIT



Technical Data

Standard	: IEC61439-1 10.3, 10.4, 10.9.2
Rated Operational Voltage	: Single Phase 220-240V
Rated Current	: 63A
Network Frequency	: 50Hz
Short Circuit Protection	: 10kA
Cable Entry	: Knock-Out
Suitable Temperature	: 10 - 40°C
Pollution Degree Rating	: Pollution Degree 1
Bus-Bar Thickness	: 1.5mm
Type Of Rail	: DIN Type
Enclosure Type	: Metal
IP Degree Of Protection	: MIN IP2X
IK Degree Of Protection	: IK05

TYPE	No. Of Circuits	Weight (kg)	DIMENSION(mm.)			ราคา PRICE
			A	B	C	
UCB-08	6	1.82	252	198	95	2,000
UCB-12	10	3.10	337	208	95	2,500
UCB-16	14	4.02	435	242	95	3,100

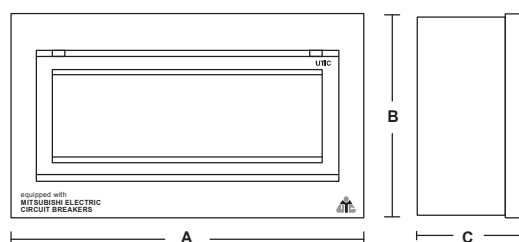

มินิเอเจอร์ เซอร์กิต เบรกเกอร์
MINIATURE CIRCUIT BREAKER (MCB)

SPECIFICATION				ราคา(PRICE)		
ชื่อรุ่น TYPE	กระแสลัดวงจรสูงสุด RATED BREAKING CAPACITY (kA)		ขนาดพิกัดกระแส RATED CURRENT(AMP) (AT)	1 สาย 1 Pole	2 สาย 2 Poles	3 สาย 3 Poles
	230V	400V				
BH-D6	6	6	10, 16, 20	200	470	830
			25, 32	220	530	920
			6, 40	260	670	1,070
			50, 63	360	860	1,280
BH-D10	10	10	10, 16, 20	320	670	1,350
			25, 32	360	730	1,460
			6, 40	430	820	1,700
			50, 63	580	1,060	2,070
BV-DN (RCBO) มอก.909-2548	4.5	-	6, 10, 16, 20 (30mA)	-	2,190	-
			25, 32 (30mA)	-	2,400	-
			40 (30mA)	-	2,880	-

BV-D (RCCB) มอก.2425-2552

SPECIFICATION		ราคา(PRICE)			
ชื่อรุ่น TYPE	ขนาดพิกัดกระแส RATED CURRENT(AMP)	1 สาย 1 Pole	2 สาย 2 Poles	3 สาย 3 Poles	4 สาย 4 Poles
BV-D	25 (30mA)	-	2,510	-	4,330
	40 (30mA)	-	2,660	-	4,580
	63 (30mA)	-	3,190	-	5,950

