



#### General Specifications

Reference standard	: EN/IEC 60051
Case-dimensions	: DIN 43700
Scales and pointer	: DIN 43802
Magnetic influence	: DIN 43780
Safety	: IEC 1010-1
Housing	: Self-extinguishing polymer PC according to UL94V-0
Glass	: Anti-dazzling
Accuracy class	: 1.5,
Operating frequency	: 4 ~65Hz
Dielectric test voltage	: 2KV/ 50Hz/ 1minute
Overload AC voltage	: x1.2 continuous(x2 for 5 seconds)
Overload AC Current	: x1.2 continuous(x10 for 5 seconds)
Power consumption	
Voltage from 1 to 4VA	: 1.8VA for 250V, 3.3VA for 500V
Current from 0.3 to 1.5VA	: 0.7VA for 1A, 1.2VA for 5A
Reference temperature	: 23°C ± 2°C
Operating temperature	: -25°C to 65°C
Storage temperature	: -35°C to 70°C
Relative humidity	: ≤85%



HL-96A




HL-96V




ตัวล็อก  
(แบบพิเศษ)

#### CONNECTION DIAGRAM

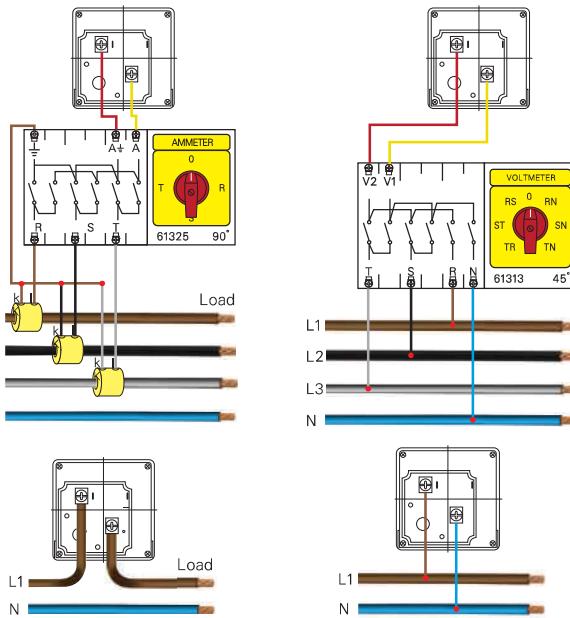

#### DIMENSION

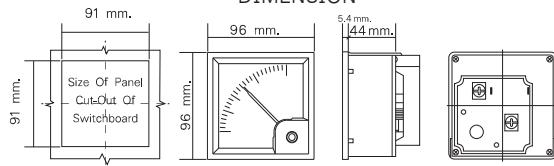

#### มิตอร์วัดกระแส มิตอร์วัดแรงดัน แบบกันน้ำ (Ammeter Voltmeter IP65)

IP65

รุ่น (Model)	Accuracy class	Class protection Housing/Terminal	ติดตั้ง Connection	Measuring range				ราคา(฿)
				5/5A	10/5A	15/5A	20/5A	
HL-96A	1.5	IP65/IP20	Through current transformers (5A)	30/5A	40/5A	50/5A	60/5A	840.-
				80/5A	100/5A	125/5A	150/5A	
				160/5A	200/5A	250/5A	300/5A	
				400/5A	500/5A	600/5A	800/5A	
				1000/5A	1200/5A	1250/5A	1500/5A	
				1600/5A	2000/5A	2500/5A	3000/5A	
				4000/5A	5000/5A			
HL-96A	1.5	IP65/IP20	Direct (ต่อตรง)	5A	10A	15A	20A	840.-
				30A	40A	50A		
				60A	100A			
HL-96V	1.5	IP65/IP20	LN , LL	300V	500V			870.-

\* ราคานี้ค่าไม่รวมภาษีมูลค่าเพิ่มและราคากำจดเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า \*