


GROUNDING BUS – BAR

หัวต่อสายดิน (สำหรับใช้ในตู้คอนโทรล)




MODEL	POLE	DIMENSION						PRICE
		H	H1	W	D	L1	L	
G-9604	9 MM. x 4P	31	9	17	6	64	7	70.-
G-9606	9 MM. x 6P	31	9	17	6	79	91	75.-
G-9608	9 MM. x 8P	31	9	17	6	94	10	80.-
G-9610	9 MM. x 10P	31	9	17	6	109	12	90.-
G-9612	9 MM. x 12P	31	9	17	6	124	136	100.-
G-12804	12 MM. x 4P	31	12	17	8	72	8	100.-
G-12806	12 MM. x 6P	31	12	17	8	92	10	110.-
G-12808	12 MM. x 8P	31	12	17	8	112	124	120.-
G-12510	12 MM. x 10P	31	12	17	8	1		130.-
G-12812	12 MM. x 12P	31	12	17	8	152	164	140.-

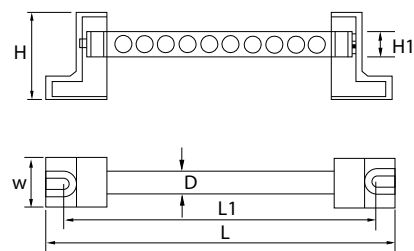

BUS BAR

BUS BAR INSULATOR

ฉนวนบัสบาร์แบบลูกถ้วย

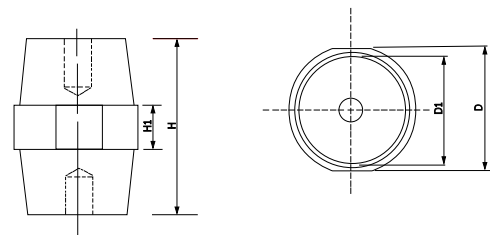

SM-SERIES

MODEL	SIZE (MM)				TENSILE STRENGTH (Lbs)	VOLTAGE WITHSTAND (KV)	TONGUE STRENGTH (FT Lbs)	SCR (MM)	SCR DEPTH (MM)	WEIGHT(G)	PRICE
	D	D1	H	H							
SM25	30	25	25	10	500	6	6	6	9		20.-
SM30	33	29	30	10	550	8	8	8	11	47	20.-
SM35	33	29	35	10	600	10	10	8	11	50	25.-
SM40	38	35	40	10	650	12	12	8	11	79	50.-
SM45	36	32	45	12	1000	14	20	8	11	7	55.-
SM51	36	32	51	12	1000	15	20	8	14	8	50.-
SM76	48	41.5	76	15.5	1500	25	40	10	20	200	90.-

* ราคาข้างต้นอาจเปลี่ยนแปลงได้โดยไม่ต้องแจ้งให้ทราบล่วงหน้า
Prices are subjected to change without prior notice